
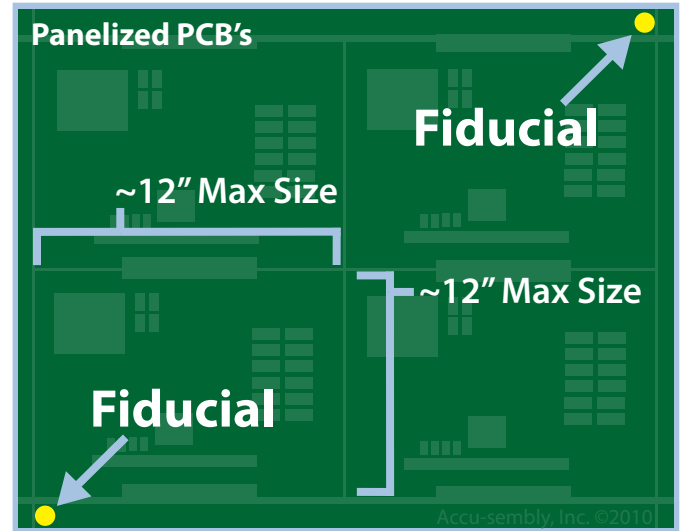


SMT PCB Requirements

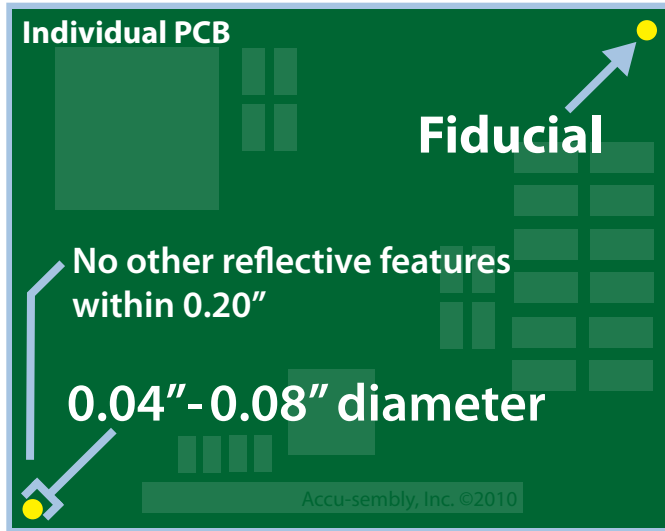

- 1) For precise parts placement, a pair of fiducials (marks) must be incorporated in the PCB. These marks should be between 0.04" and 0.08" in diameter and should be located at opposite corners of the board.
- 2) There should be no other reflective features within 0.20" of any fiducial.
- 3) A practical size limit for panelized boards is about 12" square.

Notes: